



# GutterScrew

## Replaces Old Popping Gutter Spikes!

The design features of this FastenMaster product include:

- Oversized thread diameter tightly fills the existing spike hole for better holding strength and a watertight fit.
- #3 square drive virtually eliminates cam-out during hard-to-reach installations
- Durable UV resistant white and brown head paint matches most gutter systems
- Thick galvanized base coating guaranteed not to rust or react with aluminum
- Free driver bit included
- American made



For more information or free samples, call Hodell-Natco at 800-562-9742.

**INSTALLATION PROCEDURE**

For existing gutters installed using spikes, first remove the existing spike and ferrule. With a standard drill install the FastenMaster GutterScrew and ferrule using the #3 square drive bit provided. For new gutter installations, pre-drill a 1/4" hole with spacing as recommended by the gutter manufacturer. Then install the new gutter screw and ferrule as instructed above. Note that the 7" FastenMaster Gutter Screw is recommended for use with 5" standard residential gutter systems.

Part Number	Screw Length	Color	Quantity per Pack
FMGUT007-10B	7"	Brown	10
FMGUT007-10W	7"	White	10
FMGUT007-25B	7"	Brown	25
FMGUT007-25W	7"	White	25


**PRODUCT FEATURES**

**#3 SQUARE DRIVE  
 REDUCES BIT CAM OUT**

**WHITE OR BROWN COLOR  
 MATCHED HEAD**

**GUARANTEED CORROSION  
 RESISTANT ZINC  
 BASECOAT ELIMINATES  
 RED RUST**

**.310 DIAMETER THREAD  
 GRIPS EXISTING .250  
 DIAMETER HOLE**

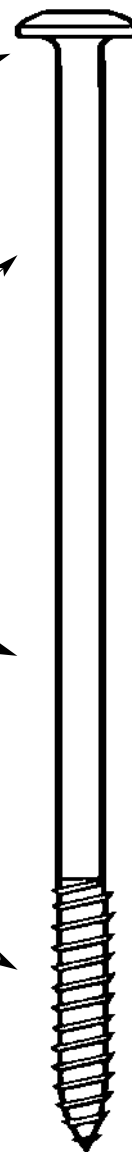

BP03004-20M-AVL